

LOW FREQUENCY REFLOWABLE CYLINDRICAL WATCH CRYSTAL



6.0 x ϕ 1.9mm

AB26TRB

Pb in high melting temperature type solders
(exempt per RoHS 2002/95/EC Annex (7a))

RoHS
Compliant

FEATURES:

- Formed leads for low cost SMD type
- Excellent shock resistance
- Reflow Capable
- Low cost for consumer applications
- IR reflow capable

APPLICATIONS:

- Real time clock
- Measuring instruments
- Blue-tooth and wireless applications

STANDARD SPECIFICATIONS:

Parameters	Minimum	Typical	Maximum	Units	Notes
Center Frequency		32.768		kHz	
Operating Temperature	-40		+85	°C	
Turnover Temperature	+20	+25	+30	°C	
Storage Temperature	-55		+125	°C	
Frequency Tolerance @+25°C	-20		+20	ppm	
Frequency Coefficient (β)	-0.040	-0.034	-0.028	ppm/T ²	
Equivalent series resistance (R1)		35	50	k Ω	@25°C
Shunt capacitance (C0)		1.35		pF	
Load capacitance (CL)		12.5		pF	
Drive Level			1	μ W	
Quality Factor		70,000			
Aging	-3		+3	ppm	@25°C \pm 3°C First year
Insulation Resistance	500			M Ω	@ 100Vdc \pm 15V

OPTIONS & PART IDENTIFICATION: (Left blank if standard)

AB26TRB-32.768kHz - - -

Load Capacitance (pF)
Blank: 12.5pF
6: 6pF
10: 10pF

Freq. Tolerance
1: \pm 10 ppm
7: \pm 15 ppm

Packaging
Blank: Bulk
T: Tape & Reel

LOW FREQUENCY REFLOWABLE CYLINDRICAL WATCH CRYSTAL




6.0 x ϕ 1.9mm

AB26TRB

Pb in high melting temperature type solders
(exempt per RoHS 2002/95/EC Annex (7a))

RoHS
Compliant

OUTLINE DIMENSIONS:

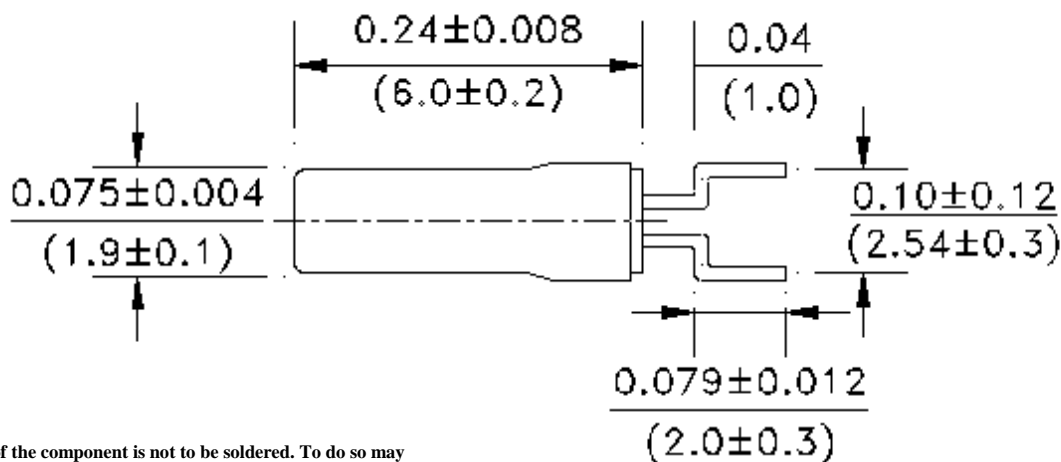


NOTE:

The body/can of the component is not to be soldered. To do so may cause damage to the crystal.

Use Adhesive/Bonding Materials (i.e. Rubber Adhesive, Epoxy, etc) to affix the component body to the PCB.

Recommended Land Pattern

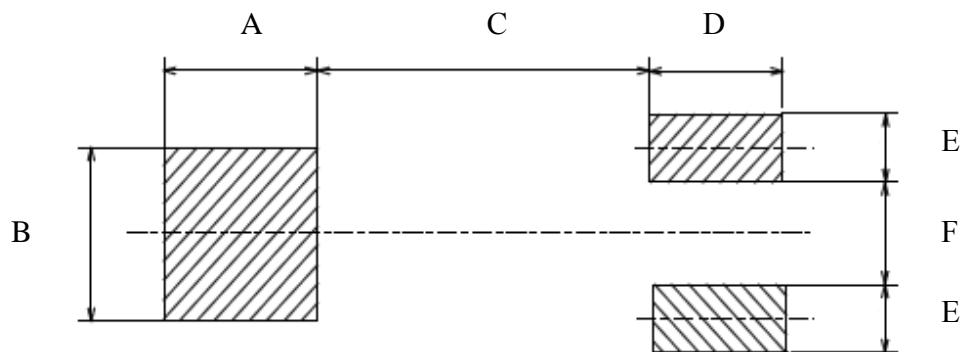

A	B	C	D	E	F
0.099 (2.5)	0.099 (2.5)	0.21 (5.25)	0.099 (2.5)	0.04 (1)	0.06 (1.5)

Dimensions: inches (mm)